

HYDRAULIC IMPACT WRENCH

DHW 3034 - DHW 301 - DHW 501

kg 7,6

KW Hydraulik
Aggregate und Werkzeuge

www.kw-hydraulik.de info@kw-hydraulik.de +49 3675 421980

- **Torque control: adjustable torque up to 3000-5000 Nm, for the hardest bolts.**

- **3-jaw hammer mechanism type**


- **Motor cover with heat dissipation**

- **Rotation inverter**

- **Handle entirely made in Ergal**


- **Ergonomic handle with integrated oil flow**

- **Mechanical trigger with safety lever**

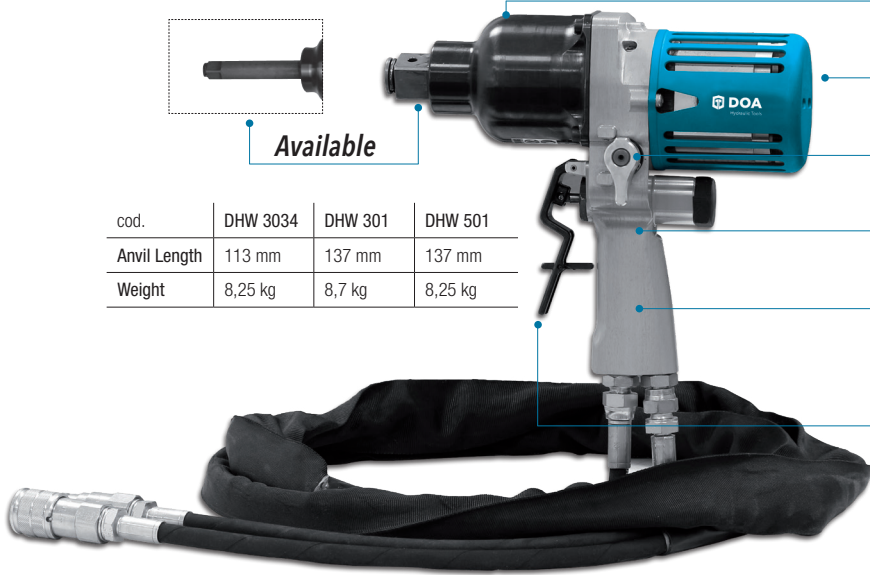

Available

cod.	DHW 3034	DHW 301	DHW 501
Anvil Length	113 mm	137 mm	137 mm
Weight	8,25 kg	8,7 kg	8,25 kg



Available in
underwater version

Ideal for: mechanical and industrial workshops, infrastructures and railway applications, oil&gas, mining and cold workplaces when no air supply is available.

TECHNICAL CHARACTERISTICS	DHW 3034	DHW 301	DHW 501
Weight (kg)	7,6	7,7	8,8
Square drive	3/4"	1"	1"
Bolt range	M14 - M24	M18 - M33	M18 - M36
Max torque	3000 Nm	3000 Nm	5000 Nm
Free speed	2800 rpm	2800 rpm	1700 rpm
Max oil flow	10-20L/min	10-20L/min	10-20L/min
Length	421 mm	288,8 mm	323,4 mm
Side to center	62 mm	57 mm	57 mm

